

Technical Specifications

T300

Signal Tracking

- 572 channels with simultaneously tracked satellite signals
- GPS: L1, L2, L2C, L5
- BeiDou: B1, B2, B3
- BeiDou Global Signal: B1C, B2a²
- GLONASS: L1, L2
- Galileo: E1, E5a, E5b
- QZSS (Reserved)
- SBAS: WAAS, EGNOS, MSAS, GAGAN

Performance Specifications

- Cold start: <50 s
- Warm start: <30 s
- Hot start: <15 s
- Initialization time: <10 s
- Singal re-acquisition: <1.5 s
- Initialization reliability: >99.9%

Positioning Specifications

Mode	Accuracy
Static and Fast Static	2.5 mm + 0.5 ppm Horizontal 5 mm + 0.5 ppm Vertical
Long Observations Static	3 mm + 0.1 ppm Horizontal 3.5 mm + 0.4 ppm Vertical
Real Time Kinematic	8 mm + 1 ppm Horizontal 15 mm + 1 ppm Vertical
E-RTK (<100 km) ¹	0.2m + 1 ppm Horizontal 0.4m + 1 ppm Vertical
DGPS	<0.4 m RMS
SBAS	1 m 3D RMS
Standalone	1.5 m 3D RMS

Communications

- 1 Serial port (7 pin Lemo)
Baud rates up to 921,600 bps
- UHF modem³: Tx/Rx with full frequency range from 410-470 MHz⁴
 - Transmit power: 0.5-2 W adjustable
 - Range: 1-5 km⁵
- 4G modem
 - 4G Bands: 800/900/1800/2100/2600 MHz
 - 3G Bands: 900/2100 MHz
 - 2G Bands: 900/1800 MHz
 - Support GSM, Point to Point/Points and NTRIP
- Position data output rates: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz
- 5 LEDs (indicating Power, Satellite Tracking, GPRS Status and Differential Data)
- Bluetooth[®]: V 4.0 protocol, compatible with Windows OS and Android OS

Data Format

- Correction data I/O:
 - RTCM SC104 Version 2.x, 3.x formats, CMR(GPS only), CMR+(GPS only)
- Position data output:
 - ASCII: NMEA-0183 GSV, RMC, HDT, VHD, GGA, GSA, ZDA, VTG, GST; PTNL, PJK; PTNL, AVR; PTNL, GGK
 - ComNav Binary update to 20 Hz

Physical

- Size(W × H): Φ 15.8 cm × 7.5 cm
- Weight: 0.95 kg with two batteries

Environmental

- Operating temperature: -40 °C to + 65 °C (-40 °F to 149 °F)
- Storage temperature: -40 °C to + 85 °C (-40 °F to 185 °F)
- Humidity: 100% non-condensing
- Waterproof and dustproof: IP67, protected from temporary immersion to depth of 1 m
- Shock: Designed to survive a 2 m drop onto concrete

Electrical and Memory

- Input voltage: 5-27 VDC
- Power consumption: 3.1 W⁶
- Li-ion battery capacity: 2 × 2000 mAh, up to 9 hours typically
- Memory: 8 GB⁷

Software

- CGSurvey field data collection software
- Survey Master Android-based data collection software
- Carlson SurvCE field data collection software (optional)
- MicroSurvey FieldGenius field data collection software (optional)

1. BeiDou B3 signal is used in RTK calculating engine to enlarge length of baseline, which is only available in Asia Pacific area.
 2. BeiDou Global Signal is reserved for future upgrade.
 3. UHF Modem and 4G Modem is default configuration and it can be removed according to your specific needs.
 4. Integrated UHF ranges from 410 to 470 MHz with 12.5 KHz channel spacing.
 5. Working distance of internal UHF is varies in different environments, the maximum distance is 5 Km in ideal situation.
 6. Power consumption will increase if transmitting corrections via internal UHF.
 7. 8GB is the default internal memory and optional 16GB, 32GB is available to order. Please clarify when placing the order.
- Specifications subject to change without notice.

© 2019, ComNav Technology Ltd. All rights reserved. **SinoGNSS** is the official trade mark of ComNav Technology Ltd., registered in People's Republic of China, EU, USA and Canada. All other trademarks are the property of their respective owners. (Feb, 2019).

ComNav Technology Ltd.

Building 2, No. 618 Chengliu Middle Road,
201801 Shanghai, China

Tel : +86 21 64056796

Fax: +86 21 54309582

Email: sales@comnavtech.com

www.comnavtech.com



SinoGNSS[®]

By ComNav Technology Ltd.




T300 GNSS SURVEYING SYSTEM



FULL CONSTELLATION



BUILT-IN 4G / TX & RX



HOT SWAP CONSUMER-GRADE BATTERY



BUILT-IN 8GB INTERNAL MEMORY



IP67



LONG BASELINE RTK



COMPATIBLE WITH OTHER BRANDS GNSS RTK



LOW POWER CONSUMPTION




SUPER LIGHT



ULTRA SMALL

With SinoGNSS Quantum™ algorithm and fully integrated design, the compact sized T300 GNSS receiver is one of the most reliable choices for any surveying tasks. Strong signal tracking ability, hot swap battery and rugged housing design make the T300 perfectly and effectively work even in harsh environments.

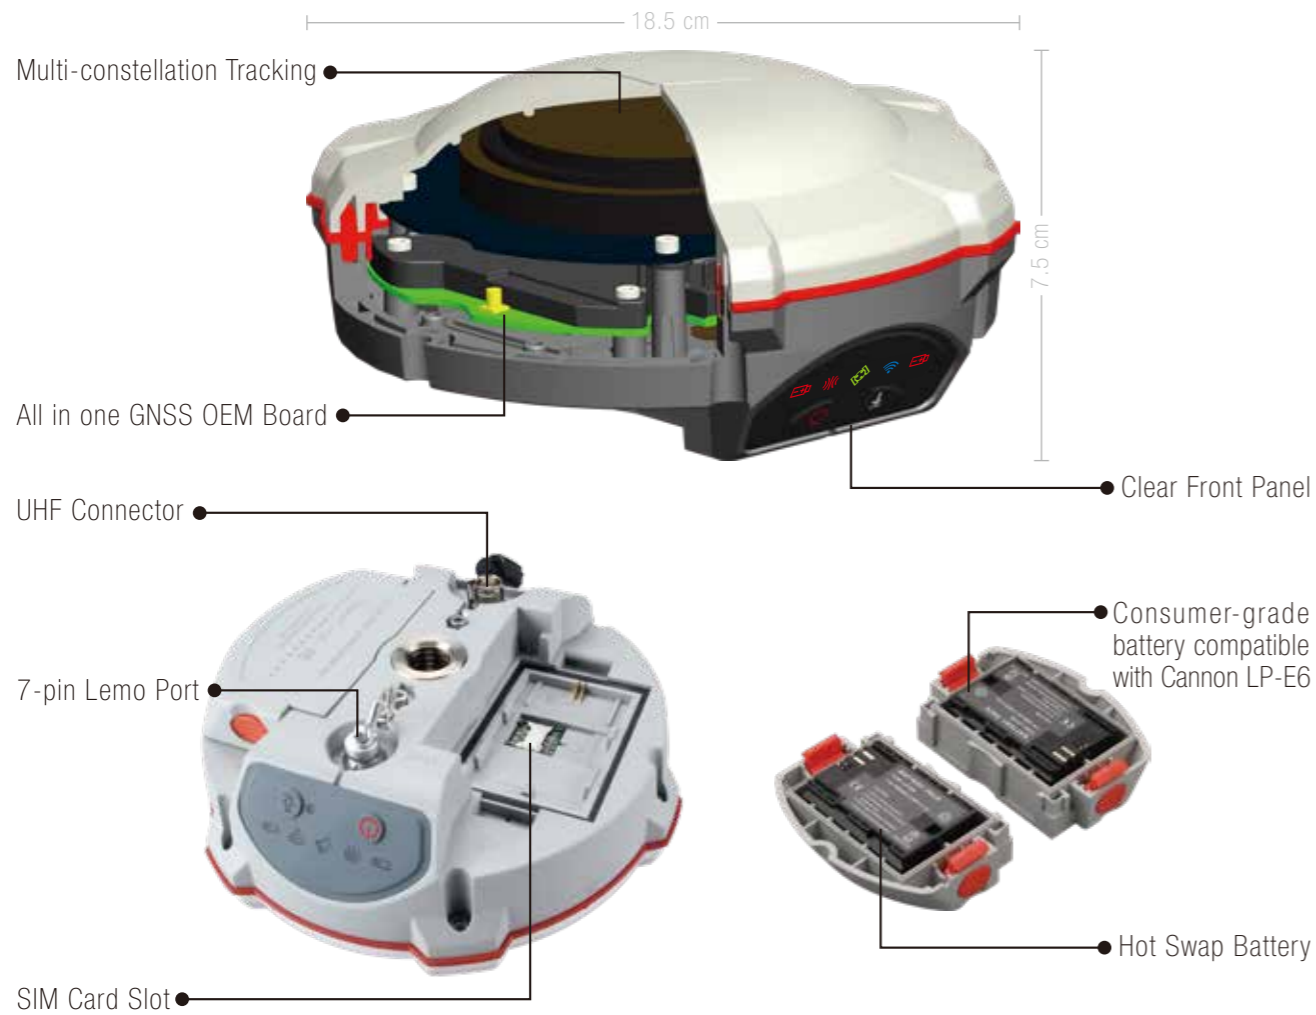

SINGLE & MULTI-CONSTELLATION COMPUTING

256 channels tracking all working constellations and each constellation can work independently



ADJUSTABLE TX & RX INTERNAL UHF*

0 – 2 Watt internal UHF allows you more convenient and effective field work rather than external radio



SEAMLESSLY WORK WITH NETWORKING RTK POSITIONING

Built-in GPRS/GSM/4G module ensure the T300 perfectly work in all kinds of CORS



HOT SWAP AND CONSUMER-GRADE BATTERY

Two hot swap batteries ensure you fluent workflow in the field. Consuming-grade battery design, compatible with Cannon LP-E6, makes it's easy to replace in local markets



USB MODE

When connecting the T300 to your PC, you just copy the logged static data from the receiver to your PC.



RUGGED LIGHTWEIGHT AND SMALL VOLUME DESIGN

IP67 Dust/Water proof design and survive a 2m drop onto the concrete. Small volume with less than 1kg weight makes the T300 is one of portable GNSS receivers meets your RTK surveying demands

* UHF is removable according to specific regulation in different countries.

DATA COLLECTOR




R500 ANDROID-BASED RUGGED DATA COLLECTOR

- Android 6.0 Operating System
- IP68 Certified
- 4.3" Sunlight Readable Touch Display
- 8 MP Camera with Autofocus
- Compact Design with Long Battery Life
- Dual SIM and Dual Standby
- Integrated 4G, Bluetooth® and WiFi



FIELD SOFTWARE

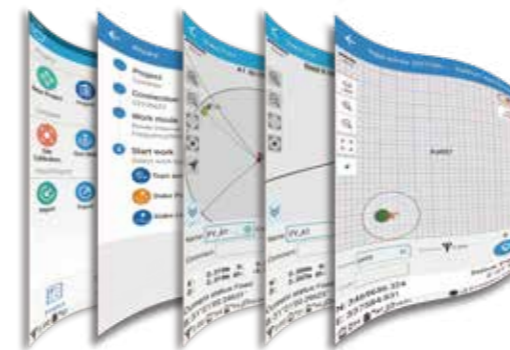

SURVEY MASTER

- Compatible with most of Android devices
- Easier survey workflow via Wizard function
- Supports all survey modes, including Static, PPK and RTK
- Access to real-time open street maps
- Collect users' feedback through Cloud Service



POST-PROCESSING SOFTWARE

SINOGNSS COMPASS SOLUTION SOFTWARE

- Provides the complete GPS/GLONASS/BeiDou/GALILEO processing solution
- Supports GNSS observation data in RINEX and ComNav Raw Binary Data formats
- Supports different post-processing in static and kinematic modes
- Outputs analysis reports in various formats (web format, DXF, TXT, KML)

